Inside box











To avoid issues during work, remember to fasten tightly all the screws







Remove nuts (x 4)







3/8

Remove screw









4/8










Unscrew right silenblock then fix the cable (blue connection)





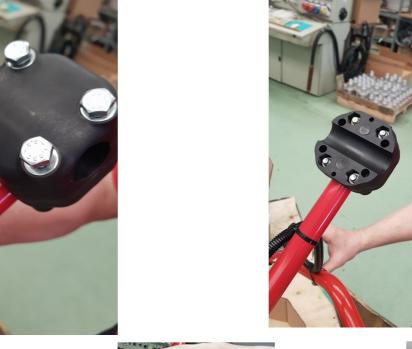







The protection carter













Finally the aluminium blade















